



WIDER 1000

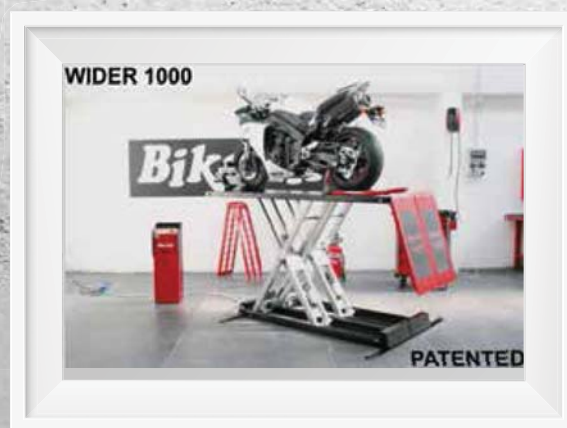

Caratteristiche Tecniche

Technical Details

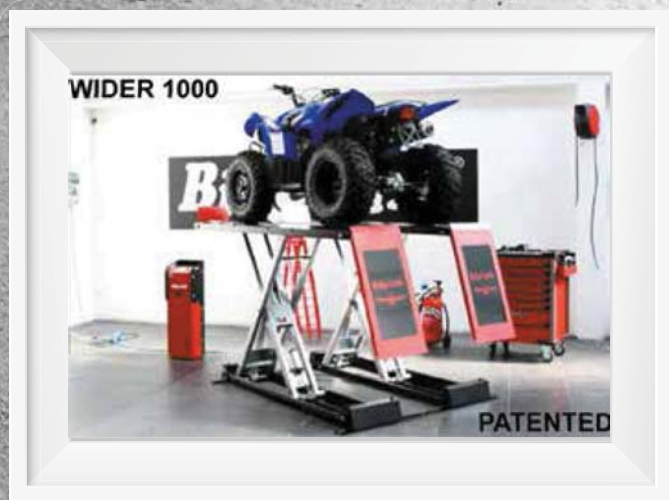

Bike-Lift
EUROPE

WD-003

Pompa Elettro Idraulica / *Electro-hydraulic pump*

Modello Registrato
Patented
Design
N° 11183040.2



Sollevamento verticale a forbice Sgancio pneumatico della barra di sicurezza	
Portata	1000kg
Altezza Massima	130cm
Altezza Minima	20cm
Numero Posizioni di Sicurezza	12
Lunghezza	230 cm
Dimensioni piano sollevamento chiuso	84x230 cm
Dimensioni piano sollevamento aperto	150x230 cm
Dimensioni binario	40x150 cm
Dimensione rampa di salita	82x40,5 cm
Ingombro totale sollevatore	240x100 cm
Peso	300 kg

CENTRALINA ELETTROIDRAULICA

Alimentazioni disponibili

Potenza	1,1 kW
Europa	230Volt-50Hz
Giappone	200Volt-50/60Hz
America	110Volt-60Hz
Torretta di controllo	di serie

DOTAZIONE DI BASE

Rampa di salita	2 PZ
Imballo standard	320kg
Cassa Legno 235x102x60cm	
Barra Fermamoto	2 PZ

Vertical scissor system lift Safety Bar pneumatic release

Maximum Load Capacity	1000 kg / 2204 Lbs
Maximum height	130 cm / 4,2 ft
Minimum height	20 cm / 7,8 Inch
Safety locking positions	12
Length	230 cm / 7,5 ft
Tabletop size when closed	84x230 cm/2,7x7,5ft
Tabletop size when spreaded	150x230 cm/4,9x7,5ft
Ground rail size	40x150 cm/1,3x4.9ft
Run-up ramp size	82x40,5 cm/2.7x1.3ft
Overall dimensions	240x100 cm/7.8x3.3ft
Weight	300 kg/661 Lbs

ELECTRO-HYDRAULIC UNIT SPECIFICATIONS

Available Voltage	
230Volt-50Hz	Europe
200Volt-50/60Hz	Japan
110Volt-60Hz	USA
Power	1,1 kW
External Control Panel	included

STANDARD EQUIPMENT

Run-up Ramp	2 Pcs
Standard Packing	
Wood Box 235x102x60cm	320kg/705Lbs
Front Safety Bar	2 Pcs



PATENTED



Binari di scorrimento laterale
Side running rails



Motore con raffreddamento a ventola che ne garantisce un uso continuato o in ambienti con alte temperature.
Fan cooled engine that ensures a non-stop use or in high temperature sites.